


- A = * Tongue Height (19")**
- B = Ground to top (inside) of receiver tube**
- C = Hitch Drop Measurement**

When level (at optimum ride height), the perimeter frame will be approx. 25" above ground level. The tongue height (A) will be approx. 19" above ground level.

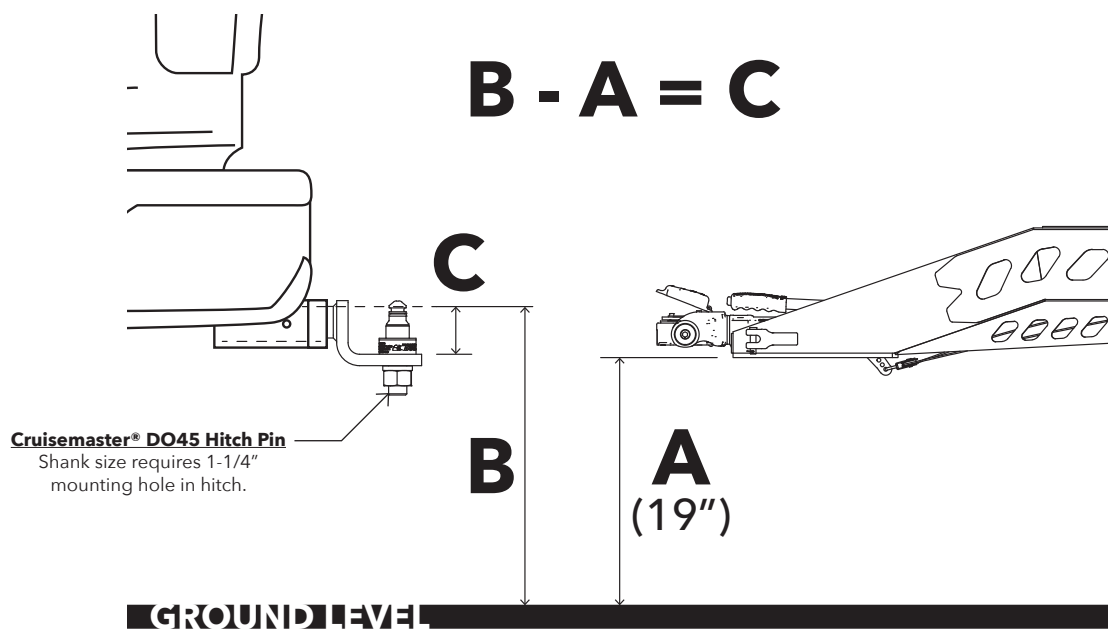

MODEL LINE: 	HITCH TYPE: 360° ARTICULATING
	DESCRIPTION: 2023 X145/X195 HITCH GUIDE
MODEL #: X145/X195	HITCH MODEL: CRUISEMASTER DO45
REVISION #: REV. 07-2022	RECEIVER SIZE: 2" MINIMUM w/ 1-1/4" MOUNT HOLE

* This information is intended to provide a starting point for determining the appropriate drop/rise needed to achieve level towing. Actual measurements may vary slightly based on tow vehicle, suspension squat under load and other related factors. Maximum stroke on tongue jack raises the tongue to 23.5". A block may be necessary for taller or lifted vehicles.